

# Fuzzy analysis and Performance Evaluation of QoS based Routing in MANET

<sup>1</sup>V.Seethalakshmi, <sup>2</sup>Dr.G.Mohankumar

<sup>1</sup>Associate professor/ECE, Sri Shakthi Institute of Engineering and Technology, Chinnampalayam, Coimbatore-641062  
[email-vseetha14@gmail.com](mailto:email-vseetha14@gmail.com) ph: 9345644443

<sup>2</sup>Principal, Park College of Engineering and Technology, Kaniyur, Coimbatore-641059 [email-gmohankumar68@yahoo.com](mailto:gmohankumar68@yahoo.com) ph:9443743348

**Abstract:** A Mobile Adhoc Network (MANET) is a self-configuring infra- structureless network. The emergence of real-time applications such as multimedia services, disaster recovery, etc., and the widespread use of wireless and mobile devices has generated the need to provide quality-of-service (QoS) support in MANET. But QoS provisioning in MANETs is a very challenging problem. This is because of wireless multi-hop communication, limited battery power, each device in a MANET is free to move independently in any direction, range of mobile devices as well as the absence of a central coordination authority. Therefore, an effort has been made to create a new QoS based Stable Energy Aware Ad hoc Routing protocol (QSEAAR). To analyze overall performance of QSEAAR, the inputs are fed into an efficient system based on **fuzzy logic** theory to choose the adaptive values of the protocol depending on the two inputs.

**Key words:** AOMDV, RREQ, RREP, MANET, ADHOC, QSEAAR, SEAAR

## 1. Introduction

MANET is a wireless infra structureless network having mobile nodes. Each node will act as a router and forward data packets to other nodes. Ad hoc networking is becoming very popular nowadays and will emerge as an effective complement to wired or wireless LANs, and even to wide-area mobile networking services, such as Personal Communication Systems (PCS). The most important design criterion for any type of network is guaranteeing Quality of Service. QoS measures include bandwidth, delay and delivery guarantee. Different classes of traffic (e.g. voice, data, image, video, etc.) has different bandwidth and delay requirements. QoS-aware routing takes into consideration multiple QoS requirements, link dynamics, as well as the implication of the selected routes on network utilization, rendering QoS routing a particularly challenging problem. However, the unique features of MANETs, namely dynamically varying network topology, imprecise state information, lack of central coordination, error-prone shared radio channel, hidden terminal problem and time-varying

capacity **exacerbated** the already complex routing problem. More importantly, node mobility causes frequent failure and reactivation of links, effecting a reaction to the changes in topology from the **network** routing, thus increasing network control traffic and saturating the already congested links. Hence, all these aspects necessitate a cost-effective QoS-aware routing [1].

To support QoS, a service can be characterized by a set of measurable pre specified service requirements such as minimum bandwidth, maximum delay, maximum delay variance and maximum packet loss rate [2]. However, many other metrics are also used to quantify QoS and in this paper bandwidth, hop count and error count are used to calculate QoS requirements. The main objective of this paper is to analyze QSEAAR protocol for various inputs and select the appropriate input to get the optimum value of output parameters.

## 2. Related work

A fairly comprehensive overview of the state of the field of QoS in networking was provided by Chen in 1999 [3]. Chakrabarti and Mishra [4] later summarized the important QoS related issues in MANETs in 2001 and their conclusions highlighted several significant points in MANET research. It includes admission control policies and protocols, QoS robustness and QoS preservation under failure conditions. In 2004, Al-Karaki and Kamal published a detailed overview [5] and the development trends in the field of QoS routing. They highlighted some areas such as security and multicast routing requiring further research attention. They were categorized the QoS routing solutions into various types of approaches: Flat, Hierarchical, Position-based and power aware QoS routing. Reddy et al. [6] provided a thorough overview of the more widely accepted MAC and routing solutions for providing better QoS in MANETs. L.Chen et al. proposed QoS aware routing protocol [7]. The authors introduce the bandwidth estimation by disseminating bandwidth information through Hello messages. The authors compare two different methods of estimating bandwidth. The IEEE 802.11E [8] standard MAC

(Medium Access Control) enhancements enable some QoS guarantees through MAC level service differentiation. The QoS routing protocol should respond quickly in case of path breaks and recompute the broken path or bypass the broken link without degrading the level of QoS. This is a complex and difficult issue because of the dynamic nature of the network topology and generally imprecise network state information [9].

Lei Chen et al. [10] proposed network architecture to support QoS in Manet. Heni Kaaniche et al. [11] suggest an approach to estimate available resources which is based on the estimation of the busy ratio of the shared canal. Anelise Munaretto, Mauro Fonseca [12] proposed the QOLSR protocol which includes quality parameters to the standard OLSR. Muhammad Ibrahim et al. [13] discussed some problems that may occur in providing QoS to Mobile nodes in Mobile Adhoc networks and solution for managing those problems, like dynamic topologies that change continuously and unpredictable at any time. L.Hanzo (II.), R. Tafazolli [14] include a thorough overview of QoS routing metrics, resources, and factors affecting performance and described their interactions with the medium access control (MAC) protocol. CH. V. Raghavendran [19] describes the challenges and approaches for QoS aware routing techniques. Bhagyashri. R. Hanji et al. [20] gives detailed survey of strength, weakness and applicability of existing QoS routing protocols. N. Sarma and S. Nandi[21] presents a route stability-based multipath QoS routing protocol for mobile ad hoc networks to support throughput and delay sensitive real-time applications in these networks.

B. Vamsee Mohan et.al.[22] propose a novel Reliable Routing Algorithm (RRA) in mobile ad hoc network using fuzzy Petri net and its reasoning mechanism. Dhafer R. Zaghar et.al [23] used the fuzzy technique to simplify the QoS factor and summarize it in a simple form or in a single value for each application. C. Gomathy et al [24] designed a fuzzy-based priority scheduler to determine the priority of the packets. Onifade O.F.W et.al[25] proposed Fuzzy Self Organizing Map(FSOM) provide very efficient algorithmic tools for transmitting packet in an efficient manner by taking the most efficient route and also the bandwidth, latency and range are considered to determine how good is the data delivered. Abduladhem A. Ali et al [29] proposed fuzzy routing method is evaluated and compared with conventional AODV routing in terms of packet delivery ratio, average of end to end delay, and average of energy consumption. M. Marimuthu et al [30] proposed Fuzzy Cost Based Power Aware QoS Routing (FCPAQR) protocol to select an optimal path by considering multiple independent QoS metrics

### III. Qos Based Seaar (QSEAAR)

In this section Stable Energy Aware Adhoc Protocol (SEAAR) with power aware and stability concept in [26] is extended by including QoS parameters

and new protocol QSEAAR is proposed. In QSEAAR protocol, IEEE 802.11 MAC layer is taken and the same MAC layer bandwidth is considered for the transmission. With this, available bandwidth estimations are done. The parameters considered for QoS are explained below.

**Error Count (EC)** -The EC is the maximum value between a set of node error counts (linkage break and node failure) for the feasible path. The smaller EC represents the more reliable routing path.

**Hop Count (HC)**-The HC is the number of hops for the feasible path. The smaller HC represents the more reliable and less cost of routing path.

**BandWidth(BW)**-Bandwidth estimation is a basic function that is required to provide QoS in MANETs. It is a way to determine the data rate available on a network route. It is of interest to users wishing to optimize end-to-end transport performance, overlay network routing, and peer-to-peer file distribution

Techniques for accurate bandwidth estimation are also necessary for traffic engineering and capacity planning support. QoS is calculated using equation given below,

$$QOS = C_1 \times \frac{EC}{Max(EC)} + C_2 \times \frac{HC}{Max(HC)} + C_3 \times \frac{BW}{MAX(BW)} \quad (1)$$

Where  $|C_1|+|C_2|+|C_3|=1$ , EC=error count, HC= hop count, BW=bandwidth,  $C_1$ ,  $C_2$ ,  $C_3$  are the values which can be chosen according to the system needs. For example, bandwidth is very important in MANETs, thus the weight of  $C_3$  factor can be made larger.  $C_1$ ,  $C_2$  factor related to path error and hop count reduce the weight of path so  $C_1$  and  $C_2$  factor can be made smaller [19]. In QSEAAR protocol, the value of  $C_1$ ,  $C_2$  &  $C_3$  are chosen as  $C_1=0.10$ ,  $C_2=0.10$  &  $C_3=0.80$ .

QoS values are calculated for the selected path and the source node tends to select the path with the high QoS value from multiple paths and data is forwarded in that path.

### 4. Results and discussion

Mobile ad hoc networks (MANETs) have been widely studied in the literature. Due to the nature of self-

organization, the dynamic topology caused by mobility and transmission power control, and the multiple-hop routing in MANETs, it is difficult to build a complete analytical model to study the network performance. On the other hand, a real test bed is expensive. Therefore, the simulation study of MANETs is important. Different simulation tools such as ns-2 with CMU monarch extension, GloMoSim and its commercial successor QualNet, OPNET, and SWANS have been developed for MANET evaluation. The simulation study presented in this paper is based on ns-2 (NS2.34) under LINUX platform because it is open source and is widely used in both academia and industry [22]. Using a simulator written in C++, topologies are randomly generated, and perform the computations on these fixed graphs, which represent snapshots of the Ad-Hoc network state.

Table 1: Simulation Environment

Simulation Time	100s
Topology Size	500m x 500m
MAC Type	MAC 802.11
Radio Propagation Model	Two Ray Model
Radio Propagation Range	150m
Pause Time	25s
Initial Energy	100J
Transmit Power	0.4W
Receive Power	0.1W
Traffic Type	CBR
Packet size	1000bytes
Bandwidth	Based on the analysis in this section, the available link bandwidth is computed as follows: Each node is randomly assigned an "idle time" ranging from 0 to 1. The available link bandwidth between two nodes is equal to the minimum of their idle time x maximum bandwidth. Here, we consider that in the Ad-Hoc network, each link has the same maximum bandwidth, 2 Mbps. For example, if node a's idle time is 0.5 and node b's idle time is 0.3, then the available bandwidth over link ab is: 0.3 x 2Mbps = 600 kbps.
Routing Protocol	AOMDV

#### A. Network Scenario

The table 1 shows the important parameters chosen for the NS2 simulation. An effort has been done to create a new protocol QSEAAR by adding quality of service with the concept of SEAAR protocol which provides path stability, residual energy consumption. QSEAAR protocol was also analyzed in terms of packet delivery ratio, energy consumption, packet loss, throughput and end to end delay. The performance of QSEAAR protocol was compared with existing protocol AOMDV and SEAAR which shows that QSEAAR outperforms than other protocol in most of the case.

#### B. Simulation Parameters

RFC 2501 describes a number of quantitative metrics that can be used for evaluating the performance of a routing protocol for mobile wireless ad-hoc networks. Some of these quantitative metrics [23] are defined as follows:

##### 1. Packet delivery ratio

The packet delivery ratio is defined as the ratio of the number of data packets received at the destinations over the number of data packets sent by the sources as

given in equation (2). This performance metric is used to determine the efficiency and accuracy of MANET's routing protocols.

$$\text{Packet Delivery ratio} = \frac{\text{Total data packets received}}{\text{Total data packets Sent}} \times 100 \quad (2)$$

##### 2. Energy consumption

This is the ratio of the average energy consumed in each node to total energy as given in the equation (3).

$$\text{Energy consumption} = \frac{\text{Energy remaining in the node}}{\text{Total energy}} \quad (3)$$

##### 3. End to end delay

This is the average time involved in delivery of data packets from the source node to the destination node. To compute the average end-to-end delay, add every delay for each successful data packet delivery and divide that sum by the number of successfully received data packets as given in equation (4). This metric is important in delay sensitive applications such as video and voice transmission [24].

$$\text{Average End to end delay} = \Sigma \frac{(\text{Time received} - \text{time sent})}{\text{Total data packets received}} \quad (4)$$

##### 4. Throughput

The throughput metric measures how well the network can constantly provide data to the sink. Throughput is the number of packet arriving at the sink per ms. A network throughput is the average rate at which message is successfully delivered between a destination node (receiver) and source node (sender). It is also referred to as the ratio of the amount of data received from its sender to the time the last packet reaches its destination. Throughput can be measured as bits per second (bps), packets per second or packet per time slot. For a network, it is required that the throughput is at high level. Some factors that affect MANET's throughput are unreliable communication, changes in topology, limited energy and bandwidth.

##### 5. Number of Packets dropped

This is the number of data packets that are not successfully sent to the destination during the transmission. In this study the time versus the number of packets dropped have been calculated. Packet loss occurs when one or more packets being transmitted across the network fail to arrive at the destination. It is defined as the number of packets dropped by the routers during transmission. It can be shown by equations (5) to (7).

$$\text{Packet Loss} = \text{Total Data Packets Dropped} \quad (5)$$

$$\text{Packet Loss} = \text{Total Data Packets Sent} - \text{Total Data Packets Received} \quad (6)$$

$$\text{Packet loss}(\%) = \frac{\text{Total data packets dropped}}{\text{Total data packets Sent}} \times 100 \quad (7)$$

#### C Simulation Results

The performance of the following protocols is compared and applied them to the randomly generated network snapshots:

- 1) Adhoc on demand multipath routing protocol (AOMDV)
- 2) Stable Energy aware adhoc routing protocol (SEAAR)
- 3) QoS based SEAAR (QSEAAR)

The performance of SEAAR and QSEAAR is compared with the existing protocol AOMDV and the results are shown below. Fig 4.1 shows the comparison of packet loss ratio versus nodes for AOMDV, SEAAR and QSEAAR protocols in terms of packet loss. The observation is that at 60 nodes, the packet loss is less in QSEAAR and more in SEAAR. But at 120 nodes, packet loss is same as AOMDV. Higher the packet loss, less efficient is routing protocol and in this figure, AOMDV gives high packet loss than QSEAAR and SEAAR.

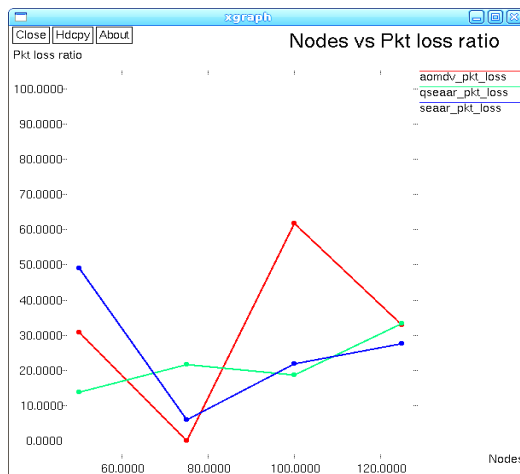


Fig 4.1 Comparison of packet loss ratio versus nodes

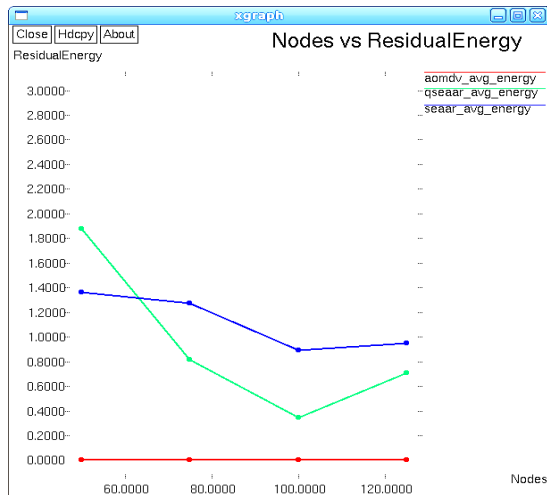


Fig 4.2 Comparison of end to end delay versus nodes.

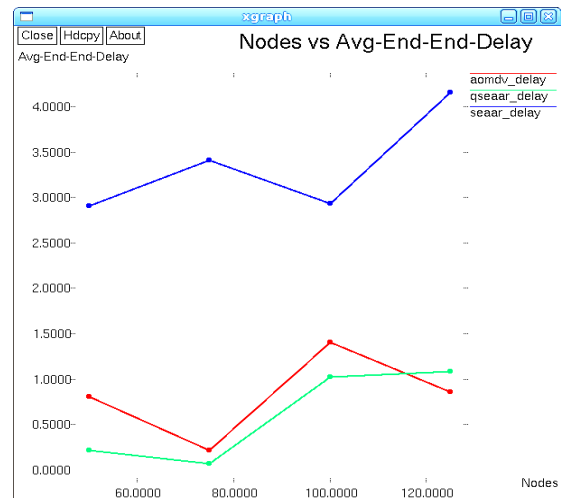


Fig 4.3 Comparison of residual energy versus nodes.

Fig 4.2 shows the comparison of end to end delay versus nodes for AOMDV, SEAAR and QSEAAR protocols. It shows that the end to end delay of network using QSEAAR is minimum as compared to SEAAR and AOMDV with 60, 80 and 100 nodes. At 120 nodes QSEAAR has a slightly more delay as compared to AOMDV. On an average performance of QSEAAR is better.

Fig 4.3 shows the comparison of residual energy versus nodes for AOMDV, SEAAR and QSEAAR protocols. It shows that the residual energy of the network is the energy remaining in the node using SEAAR is maximum compared to AOMDV and QSEAAR. Energy remaining in QSEAAR is better when the number of nodes is less and energy decreases as the number of nodes increases. On an average QSEAAR is better as compared to existing AOMDV and slightly inferior as compared to SEAAR and AOMDV. The protocol having high network throughput is more efficient and in this figure, SEAAR and gives higher throughput than AOMDV.

Figure 4.4 shows the comparison of throughput versus nodes for AOMDV, SEAAR and QSEAAR protocols. It shows that the throughput of network using SEAAR and QSEAAR is maximum compared to AOMDV. The protocol having high network throughput is more efficient and in this figure, SEAAR and gives high throughput than AOMDV.

Fig 4.5 shows the comparison of packet delivery ratio versus nodes for AOMDV, SEAAR and QSEAAR protocols. It shows that the packet delivery ratio of network using SEAAR and QSEAAR is maximum compared to AOMDV. Therefore QSEAAR outperforms AOMDV in terms of throughput, delay, energy remaining, pack loss and packet delivery ratio.

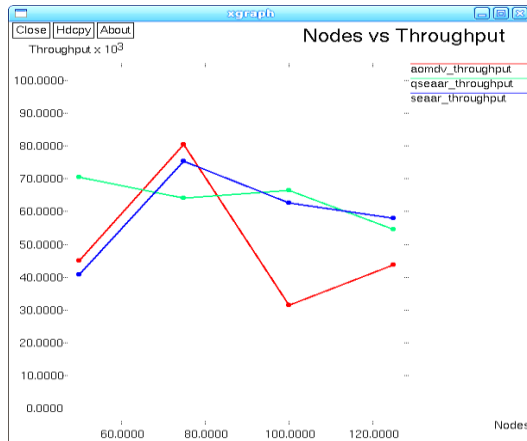


Fig 4.4 Comparison of throughput versus nodes

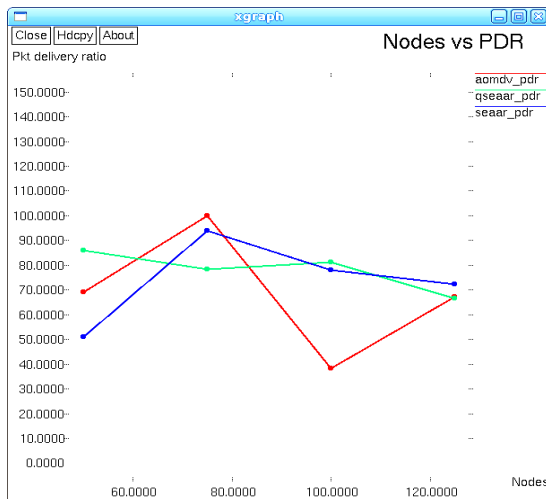


Fig 4.5 Comparison of packet delivery ratio versus nodes.

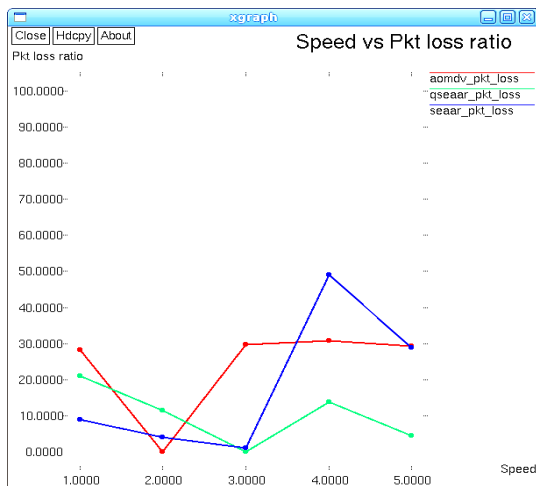


Fig 4.6 Comparison of packet loss ratio versus speed.

The performance of the protocol is analyzed with different types of mobility of the nodes. Fig 4.6 shows the comparison of packet loss ratio versus speed for AOMDV, SEAAR and QSEAR protocols. It shows that the packet loss of network using QSEAR is minimum as compared to AOMDV and SEAAR when nodes are

moving with more speed and in low mobility environment it is comparable with AOMDV.

Fig 4.7 shows the comparison of end to end delay versus speed for AOMDV, SEAAR and QSEAR protocols. It is observed that the end to end delay of network using QSEAR is minimum as compared to AOMDV and SEAAR when nodes are moving with more speed and in low mobility environment it is higher than AOMDV and less than SEAAR

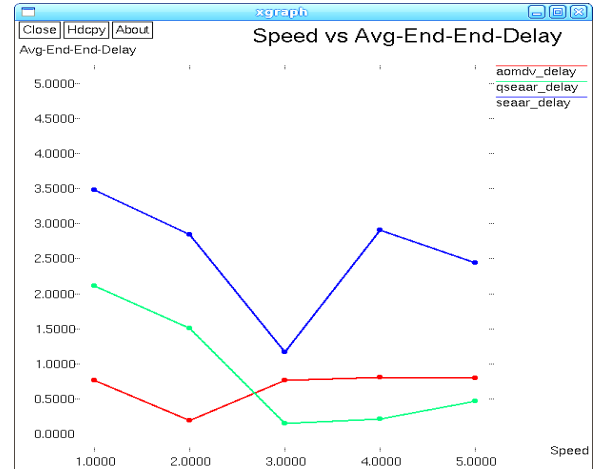


Fig 4.7 Comparison of end to end delay versus speed.

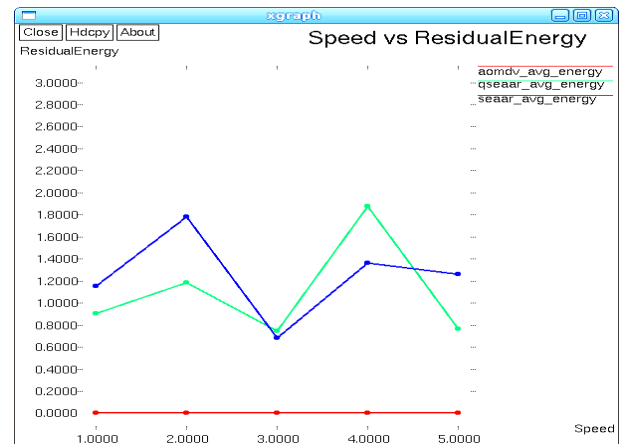


Fig 4.8 Comparison of residual energy versus speed.

Fig 4.8 shows the comparison of residual energy versus speed for AOMDV, SEAAR and QSEAR protocols. It shows that the energy remaining in the nodes using QSEAR is more as compared to AOMDV and SEAAR when nodes are moving with more speed and in low mobility environment it is higher than AOMDV and less than SEAAR.

Fig 4.9 shows the comparison of throughput versus speed for AOMDV, SEAAR and QSEAR protocols. It shows that the throughput of network using QSEAR is maximum compared to AOMDV and SEAAR and slightly inferior to SEAAR when nodes are moving with less speed

Figure 4.10 shows the comparison of packet delivery ratio versus speed for AOMDV, SEAAR and QSEAR protocols. It shows that the packet delivery



ratio of network using QSEAR is maximum compared to AOMDV and SEAAR slightly inferior to SEAAR when nodes are moving with less speed

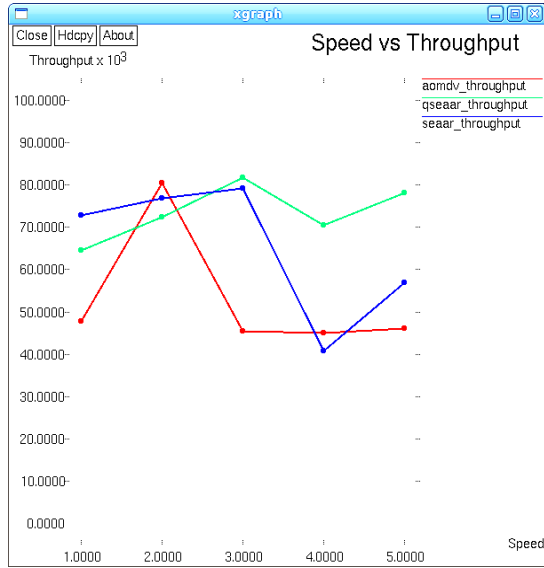


Fig 4.9 Comparison of throughput versus speed

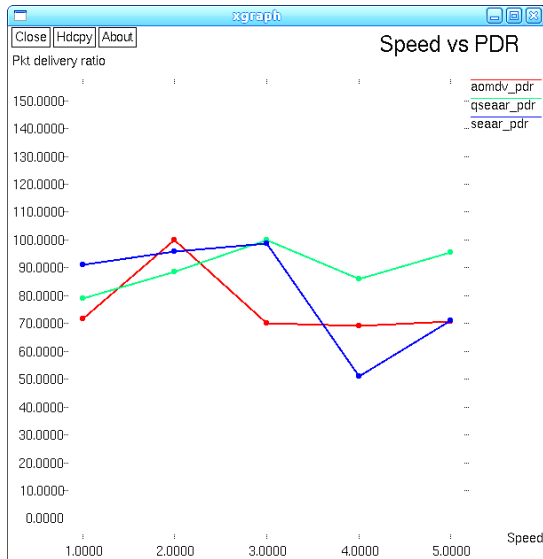


Fig 4.10 Comparison of packet delivery ratio versus speed

#### D Trace file analysis

C++ coding is written to include all the above concepts. This is linked with Tcl script written in ns-2. When the simulation is started, the working of the protocol is displayed in terminal window and the same is stored in a trace file. Some part of the output is given below. Here 50 nodes are used and each node calculate Node lifetime (NLT) and link lifetime(LLT) for all the neighbour nodes. Here sample output for node 0 is given. Node 0 calculates LLT &NLT for its neighbours 13, 11, 16

Node: 0 NLT  
13 0.00079145613 node\_lifetime: 126313

11 0.00077532311 node\_lifetime: 128868  
16 0.0013526916 node\_lifetime: 73892.8  
Node: 0 LLT  
13 link\_lifetime 65.3779  
11 link\_lifetime 104.393  
16 link\_lifetime 55.3369

The source node is taken as 39 and destination is taken as 10. Node 39 want to establish a path to 10 and it sends rote request to 10 through nodes 2,6,0,21 and 10. During that time the value of cost, bandwidth, hop count and error count are updated as shown below

Node: 39 send Route req to 10 at 29.8  
Path:39 2 6 0 21 10

Path\_bw:1.19993e+07, cost:500.753, Error\_count:6  
Node 10 sends route reply via the reverse path as shown below.

Node: 10 send Route reply  
10 21 0 6 2 39  
Reply Forward to : 21 dst: 39  
Received route reply 21 from 10  
Forward to : 0

Once route is established each node will have path table with updated next hop, bandwidth, cost and QOS values. Then data transfer starts. During that time node send data via path with higher QOS value. For example node source 39 forwards data via node 2 to the destination 10. Node 2's immediate neighbors are 41 & 6. Node 41 is having higher QOS. So node 2 selects node 41 to transfer the data.

Node: 39 Forward data to : 2  
Path\_table  
Dst:10 nhop:41 bw:1.3999e+07 cost:420.102  
qos:0.927523  
Dst:10 nhop:6 bw:1.19993e+07 cost:500.753  
qos:0.664288  
Node: 2 Forward data to : 41

## V. PERFORMANCE ANALYSIS USING FUZZY LOGIC

### A Fuzzy Inference Structure Model

Using fuzzy logic approach for academic performance evaluation is in general fairly new; it has reached a wide range of application areas [27]. According to the tradeoff between parameters, vague of information (i.e. unpre- dicted mobility of the nodes), and applications requirements, QoS in MANET cannot be calculated certainty but there is a range of acceptance to the QoS. To deal with this problem soft computing [28] will be involved; the most important part of soft computing is fuzzy logic. Fig 5.1 shows fuzzy inference system (FIS) model.

### B Fuzzy Logic System Analysis

Fuzzy inference is the process of formulating the mapping from a given input to an output using fuzzy logic. The mapping then provides a basis from which

decisions can be made, or patterns discerned. A fuzzy inference system is created based on the known output range and this utilizes the Mamdani Fuzzy logic System. The parameter depending on their availability are fed into a fuzzifier (Fig 5.2) in which they are converted into fuzzy sets. A fuzzy set contains varying degree of membership in a set. The membership values retrieved for a particular variable into a membership function. Membership function is designed for each quality of service condition which is a curve that defines how each point in the input space is mapped to a membership value. The general structure of the FIS editor is shown in Figure 5.3, where the system has two types of inputs, Speed of mobile nodes and number of nodes in the network. The output of the system is energy remaining, delay, throughput, packet delivery ratio and packet loss which represents the performance of Ad-hoc protocol in the network.

#### Input Variables with their value range

No. of Nodes [60 120], Speed [1 5]

#### Output Variables with their value range

Energy remaining [1 5], Delay [0 40], Throughput [0 100], Packet delivery ratio [0 30], Packet loss [0 80]

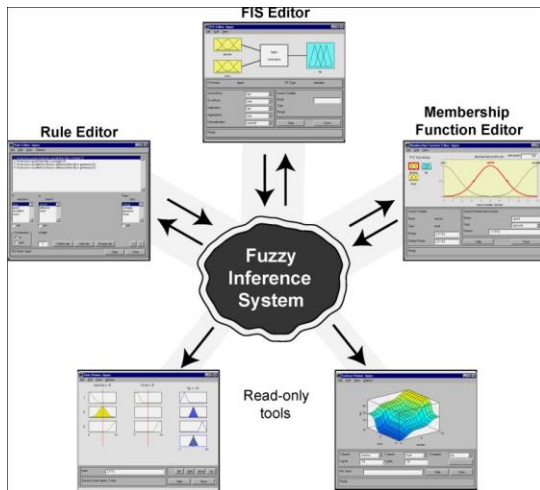


Fig 5.1: Fuzzy Inference System Model

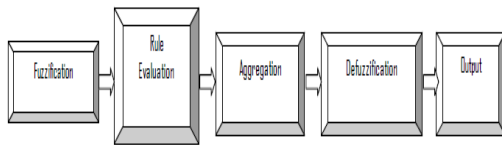


Fig 5.2 Stages in Fuzzy inference system

#### C Rule Evaluation

This is the second step where the fuzzified inputs are applied to the antecedents of the fuzzy rules. Since the fuzzy rule has multiple antecedents, fuzzy operator (AND or OR) is used to obtain a single member that represents the result of the antecedent evaluation. Here AND fuzzy operation (intersection) is applied to evaluate

the conjunction of the rule antecedents. Rules added to this system are derived by mapping the two inputs to one of the five output by using conjunction. The Rule editor shown in fig 5.4 is used to add, change or delete rules, as the name implies. The rules are entered automatically using the GUI tools Examples of some of the rules are:

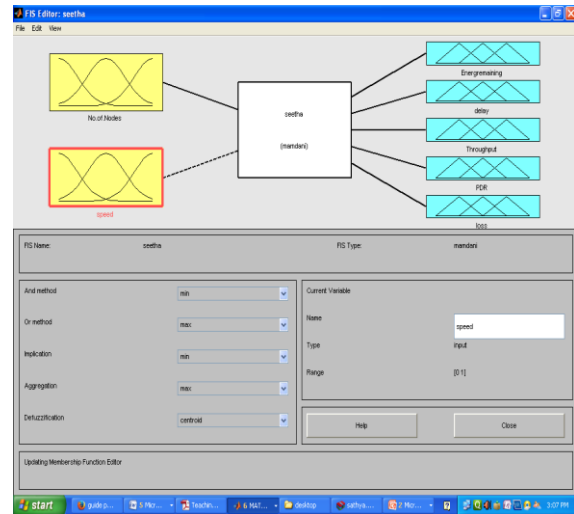


Fig 5.3 General structure of FIS Editor

1. If (No.of.Nodes is less) and (speed is less) then (Energremaining is less)(delay is less)(Throughput is bad)(PDR is less)(loss is max)
2. If (No.of.Nodes is less) and (speed is less) then (Energremaining is more)(delay is more)(Throughput is ok)(PDR is less)(loss is max)
3. If (No.of.Nodes is less) and (speed is more) then (Energremaining is averge)(delay is less)(Throughput is good)(PDR is satisfactory)(loss is min)
4. If (No.of.Nodes is less) and (speed is more) then (Energremaining is averge)(delay is less)(Throughput is good)(PDR is good)(loss is min)

The rule viewer in figure 5.5 displays a roadmap of the whole fuzzy inference process. It shows a graphical representation of each of the variable through all the rules, a representation of the combination of the rules, and a representation of the output from the defuzzification. It also shows the crisp value of the system. Data are entered for analysis through the rule viewer at the input text field. Each column of plots (yellow) shows how the input variable is used in the rules. The input values are shown at the top, and the column of the plots (blue) shows how the output variable is used in the rules. Sliding the red line changes your input values, and generate a new output response although the edit field allows you to set the input explicitly. The last output plot, a blue triangle having a

The screenshot shows the 'Rule Editor: synthia' window. The top pane contains a list of 7 rules. The bottom pane shows the editor for Rule 1, with a 'Connection' section on the left and a 'Weight' section on the right. The 'Connection' section has radio buttons for 'or' and 'and', with 'or' selected. The 'Weight' section has a text box containing '1'. The 'Add rule' button is highlighted.

**Rule Editor: synthia**

File Edit View Options

7. If (No of nodes is less) then (Emergence is more) delay is less / Through is good / PCR is good / PCR is medium (1)

6. If (No of nodes is more) then (Emergence is more) delay is medium / Through is good / PCR is satisfactory / PCR is medium (1)

5. If (No of nodes is more) then (Emergence is more) delay is more / Through is less / PCR is less / PCR is less (1)

4. If (No of nodes is more) then (Emergence is more) delay is more / Through is less / PCR is less / PCR is less (1)

3. If (No of nodes is less) and (speed is less) then (Emergence is more) delay is more / Through is good / PCR is less / PCR is less (1)

2. If (No of nodes is less) and (speed is more) then (Emergence is more) delay is less / Through is good / PCR is satisfactory / PCR is less (1)

1. If (No of nodes is less) and (speed is more) then (Emergence is more) delay is less / Through is good / PCR is satisfactory / PCR is less (1)

Then Emergence is and delay is and Through is and PCR is and

less medium none less medium none less satisfactory good none less satisfactory good none less medium none

☐ not ☐ not ☐ not ☐ not ☐ not

Connection Weight

☒ or ☐ and

1

Add rule Add rule Change rule not ok

The rule is added

Help Close

Start Back Forward Home Search Help

### D Aggregation Rule Output

### *E Defuzzification*

### *F Membership function editor*

The screenshot displays the 'Surface Fitter' software interface. The main window shows a 3D surface plot of a function, likely a paraboloid, with a color gradient ranging from blue (low values) to yellow (high values). The axes are labeled 'x', 'y', and 'z'. The 'x' axis ranges from 1 to 5, the 'y' axis from 1 to 5, and the 'z' axis from 1 to 3. The plot is rendered on a grid. Below the plot, the 'No. of Nodes' is indicated as 15, and the 'speed' is set to 1.5. The bottom window contains input fields for 'X (input)', 'Y (input)', 'No. of Nodes', 'Z (input)', 'X grid', 'Y grid', 'For input', 'Plot points', 'Help', and 'Close'. The 'Ready' status bar is at the bottom.

## G Surface Viewer

Figure 5.7 is a three dimensional curve that represents the mapping of two input. This is a two input one-output systems as they generate three dimensional plots that MATLAB can adeptly manage. The surface viewer is equipped with pop-up menus that let you select any two inputs and any one output for plotting. In figure 5.7 delay is selected as output and analyzed with two inputs. Just below the pop-up menus are two text input fields that determines how many x-axis and y-axis grid lines to include. The surface viewer has a special capability that is very helpful in cases with two (or more) inputs and one output: These axes can be grabbed and



reposition them to get a different three-dimensional view on the data.

#### H Analysis of QSEAAR using Fuzzy

Table 2. FUZZY analysis input vs output

No. of Nodes	Speed	Energy remaining(J)	End-end delay(ms)	Throughput (ms <sup>-1</sup> )	Packet delivery Ratio (%)	Packet loss (%)
60	1	3	2	50	60	49
	2	2.42	1.58	57.4	72.5	44.7
	3	2.40	0.52	87	104	40
	4	1.21	0.52	87	78.9	35.3
	5	0.95	0.52	87	73.5	31
80	1	3.0	2	50	60	49
	2	2.67	1.93	51.1	62.1	45.1
	3	2.41	1.88	52.9	63.5	40
	4	1.78	1.88	52.9	63.5	37.6
	5	0.78	1.88	52.9	63.5	37.6

The performance of QSEAAR protocol can be analyzed using Fuzzy and the results are shown in Table 2. For the given number of input nodes with varying mobility from 1 to 5 m/s how the output parameters are varying can be judged from the values given in table 2. For an example only 60 and 80 number of nodes is considered. Any number of nodes can be analyzed.

## VI. CONCLUSION

An on-demand QoS routing protocol based on AOMDV is developed for mobile adhoc networks. In the persistent data forwarding period, a source node tends to select the path with the high QoS value from multiple paths as a source route for data forwarding. Its performance is compared with that of the original AOMDV protocol with simulations. In the simulations the QoS routing protocol can produce higher throughput, less power consumption, better packet delivery ratio, lower delay and packet loss than AOMDV and SEAAR. It works the best in large networks under high network mobility. Incorporation of fuzziness in the input and output of the proposed model was seen to result in better performance.

## REFERENCES

[1]Amjad Khattak, David Harle, Haseeb Zafar, Ivan Andonovic, and Laiq Hasan, 'QoS-aware Multipath Routing Scheme for Mobile Ad Hoc Networks', in International Journal of Communication Networks and Information Security (IJCNIS) Vol. 4, No. 1, pp 1-10, April 2012

[2] Dr. Krishan kumar,D, Saurabh pal and Sanjeev Gangwar, ' Mobile Ad Hoc Networks:A Comparative Study of QoS Routing Protocols', in International journal of computer science Engineering and technology,ISSN 2231-0711, IJCSET [January 2012] Vol 2, Issue 1,771-775

[3] S. Chen, 'Routing Support for Providing Guaranteed End-to-End Quality-of-Service' Ph.D Thesis,University of IL at Urbana-Champaign, 1999.

[4] S. Chakrabarti and A. Mishra, 'QoS issues in ad-hoc wireless networks' IEEE Commun. Mag., vol.39,pp.142-148, Feb. 2001.

[5] J.N. Al-Karaki and A.E.Kamal, "Quality of Service routing in mobile ad hoc networks: Current and future trends" in Mobile Computing Handbook, CRC Publishers, 2004.

[6] I.Karthigeyan, C.S.R.Murthy, B.Manoj and T.B.Reddy, 'Quality of service provisioning in ad hoc wireless networks: a survey of issues and solutions.' Ad Hoc Networks Vol.4, pp.83-124, 2006

[7]L. Chen, W. B. Heinzelman. 'QoS-Aware Based on Bandwidth Estimation for Mobile AdHocNetworks,' IEEE Journal on Selected Areas in Communications, Vol. 23, No. 3, 561-572, 2005.

[8] G. Cao, A. D. Mathias and A. Yener, H. Zhu,' EDCFDM: 'A Novel Enhanced Distributed coordination Function for Wireless Ad Hoc Networks', IEEE International Conference on Communications (ICC), Paris, France, June 2004.

[9]S. Chakrabarthi, and A. Mishra, 'QoS issues in ad hoc wireless networks', IEEE Communications Magazine, Vol. 39, no. 2, pp. 142 - 148, February 2001.

[10] Lei Chen and Wendi Heinzelman, 'Network Architecture to Support QoS in Mobile Ad Hoc Networks' in Proceedings of International Conference on Multimedia and Expo, page 1715-1718. IEEE, 2004

[11] Fatma Louati Heni, Farouk Kamoun, Kaaniche and Mounir Frikha,'A Qos Routing Protocol Based on available Bandwidth Estimation for Wireless Ad Hoc Networks' in International Journal of Computer Networks & Communications (IJCNC) Vol.3, No.1, pp 219-239,January 2011,DOI : 10.5121/ijcnc.2011.3114

[12]Anelise Munaretto , Mauro Fonseca, " Routing and quality of service support for mobile ad hoc networks",Computer Networks Elsevier, pp 3142-3156, 2007

[13] Fasee Ullah, Muhammad Ibrahim, Tahir Mehmood,'QoS providence and Management in Mobile Ad-hoc networks,in 2009 International Conference on Computer Engineering and Applications and IPCSIT,vol.2,(2011),pp 244-249 IACSIT Press, Singapore.

[14] L.Hanzo (II.), R. Tafazolli, "A Survey of QoS Routing Solutions for Mobile Ad hoc Networks", IEEE Communications Surveys and Tutorials, Vol. 9, No. 2, 2007, pp. 50-70

[15] Ashwani Kush and Sunil Taneja, "A Survey of Routing Protocols in Mobile Ad Hoc Networks" International Journal of Innovation, Management and Technology, Vol. 1, No. 3, August 2010 ISSN: 2010-0248.

[16] J. J. Garcia-Luna-Aceves, H. R. Sadjadpour, and X. Wu, "An analytical framework for the characterization of link dynamics in MANETs," in Proc. IEEE Mil. Commun. Conf., 2006, pp. 1-7.

[17] Chunhung Richard Lin and Jain-Shing Liu,' Distributed QoS Routing in Ad Hoc Wireless Networks' in IEEE journal on selected areas in communications, Vol. 17, No. 8, pp 1488-1504, August 1999

[18] Ying Ge,'Quality-of-Service Routing in Ad-Hoc Networks Using OLSR' A thesis submitted for the degree of Master of Computer Science,Ottawa-Carleton Institute of Computer Science

[19] G. Naga Satish, K.N.S.L. Kumar P, CH. V. Raghavendran and Suresh Varma, , 'Challenges and Advances in QoS Routing Protocols for Mobile Ad Hoc Networks' in International Journal of Advanced Research in Computer Science and Software Engineering, Volume 3, Issue 8, pp 121-127 August 2013 ISSN: 2277 128X ,

[20] Bhagyashree. R. Hanji, Rajashree Shettar 'Survey on QoS Routing protocols challenges and recent advances in MANETs', Journal of Computing Technologies 2012, ISSN 2278 – 3814

[21] S. Nandi and N. Sarma, —A Multipath QoS Routing with Route Stability for Mobile Ad Hoc Networks, IETE Technical Review, Vol. 27, no. 5, pp.380-97, Sep-Oct 2010

[22] B. Vamsee Mohan\* V. V. Sunil Kumar J. Vamsi Nath, 'A Reliable Routing Algorithm in MANET Using Fuzzy Logic', in International Journal of Advanced Research in Computer Science and Software Engineering, Volume 2, Issue 10, October 2012 ISSN: 2277 128X

[23] Dhafer R. Zaghar, Thulfiqar S. Aldeen A. AL Wahab, 'Simplified the QoS Factor for the Ad-Hoc Network Using Fuzzy Technique' in Int. J. Communications, Network and System Sciences, 2013, 6, 381-387.

[24] Analysis with Multicast Routing Protocols, in EURASIP Journal on Wireless Communications and Networking 2005:3,426–436. [24] C. Gomathy, S. Shanmugavel, ; Supporting QoS in MANET by a Fuzzy Priority Scheduler and Performance

[25] Onifade O.F.W., Ojesanmi O.A, Oyeibisi T.O., 'Better Quality of Service Management With Fuzzy Logic In Mobile Adhoc Network, in African Journal of Computing & ICT, IEEE, Vol 6. No. 1, March 2013

[26] Dr.G. Mohankumar ,V. Seethalakshmi, , 'Performance Evaluation of Stable Energy Efficient Node Disjoint Adhoc Routing protocol', in Journal of Applied Sciences Research, 9(8): 4535-4547, 2013 ISSN 1819-544X

[27] R. S. Yadav and V. P. Singh, "Modeling Academic Performance Evaluation Using Soft Computing Techniques: A Fuzzy Logic Approach," *International Journal on Computer Science and Engineering (IJCSE)*, Vol. 3, No. 2, 2011, pp. 676-680.

[28] H.-J. Zimmermann, "Fuzzy Set Theory," John Wiley & Sons, Inc., Vol. 2, 2010.

[29] Alimohammad Latif, "An Adaptive Digital Image Watermarking Scheme using Fuzzy Logic and Tabu Search", Journal of Information Hiding and Multimedia Signal Processing, Vol. 4, No. 4, pp. 250-271, October 2013

[30] M. Marimuthu A. Kannammal, Fuzzy Cost based Power Aware QoS Routing Protocol with Mobility Prediction in Mobile Ad Hoc Networks in International Journal of Computer Applications, Volume 58 Number 15, 2012

Coimbatore. Her research interest is Network Routing. She has rich 16 years of experience in industry as well as teaching. She has presented 16 papers in national conference and 18 papers in international conferences. She has published 10 papers in international journal and published 1 book titled "An empirical Solution for lifetime extension in sensor nodes" by LAMBERT Academic publishing, Germany



**Dr.G.Mohankumar** is working as Principal in Park College of Engineering and Technology, Coimbatore. He has done his B.E in Mechanical Engineering from IRTT, Erode, Tamilnadu, M.E in Manufacturing Technology from NIT, Trichy and PhD in Production Technology in NIT, Trichy. He has rich 20 years of

experience in industry as well as teaching. He has presented and published 47 papers in conference and journals



**V. Seethalakshmi** is with the ECE department in Nehru Institute of Technology, Coimbatore as Associate professor. She has done her B.E in Electrical and electronics Engineering from PSG college of Technology, Coimbatore, Tamilnadu, M.Tech in Electronics and communication Engineering from PTU university, Punjab and pursuing Phd under Anna University of Technology,